
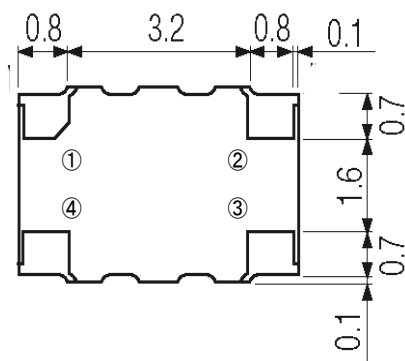


Specification: HE19200TUS		
1	Package	SMD (5 mm x 3.2 mm x 1.4 mm)
2	Type	TCXO
		(Without Tristate)
3	Frequency	19.2000 MHz
4	Stability	± 2.5 ppm max/ $-30 \sim +75^{\circ}\text{C}$
5	Voltage	$+3.0 \text{ v} \pm 5 \%$
	Input Current	1.5 mA max
6	Output Level	0.8 v p-p min
	Load	10 k Ω //10 pF
	Waveform	Clipped Sine Wave
7	Frequency Adjustment	± 9.0 ppm $\sim \pm 15$ ppm ($1/2 V_{DD} \pm 1$ v)
	Note:	

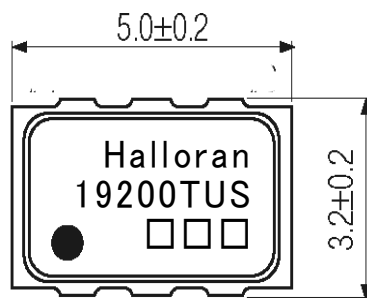

■ 接続端子
Pin Connections

①	Vcon
②	GND
③	Output
④	+3.0 v (V_{DD})