


Specification: HE35280VTFC		
1	Package	Full Size (14 pin Dip)
2	Type	VC-TCXO (Without Tristate)
3	Frequency	35.2800 MHz
4	Voltage	+5 v $\pm$ 5 %
5	Stability:	$\pm$ 1.0 ppm max/0 $\sim$ +70 $^{\circ}$ C
	Voltage	$\pm$ 0.5 ppm max/Vcc $\pm$ 5 %
	Load	$\pm$ 0.2 ppm max @20k Ω //5pF $\pm$ 10 %
6	Frequency Adjustment	$\pm$ 3 ppm min by Internal Trimer
7	Pullability	$\pm$ 5 ppm min/+2.5 v $\pm$ 2.0 v, Input Impedance: 100 k Ω
8	Output	Clipped Sine Wave 1.0 v p-p @20 k Ω //5 pF
9	Phase Noise (Typical)	-144dBc at 1 kHz, -146 dBc at 10 kHz, -158 dBc at 100 kHz
10	Note	

■ 外形寸法 Dimensions

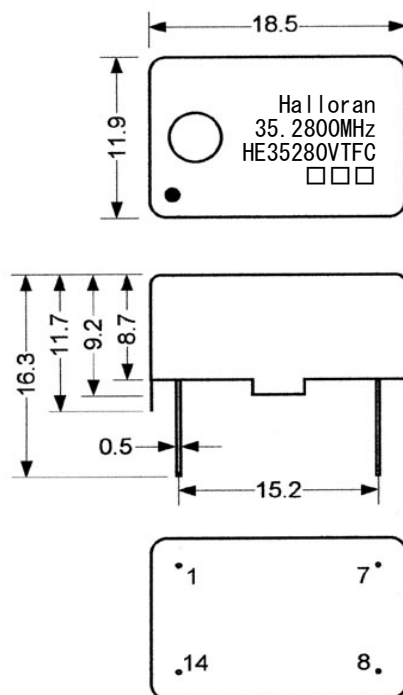

■ 接続端子 Pin Connections

Pin Connections	
①	V _c
⑦	GND
⑧	Output
⑭	V _{cc} (+5.0 v)