


Specification: HE155520SST		
1	Package	SMD (7 mm x 5 mm x 1.7 mm)
2	Type	SPXO
		(With Tristate)
3	Frequency	155.5200 MHz
4	Stability	±50 ppm max/0 ~ +70
5	Voltage	+3.3 v ± 5 %
6	Symmetry	40% to 60%
		2TTL
7	Pullability	NA
	Note:	

外形寸法 Dimensions

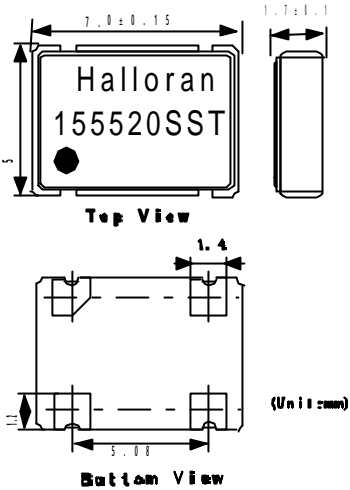


接続端子
Pin Connections

	\overline{INH}
	GND (V_{SS})
	OUTPUT
	+3.3 v (V_{DD})

Specification: HE111263SSC		
1	Package	SMD (7 mm x 5 mm x 1.7 mm)
2	Type	SPXO
		(With Tristate)
3	Frequency	111.263736 MHz
4	Stability	±30 ppm max/0 ~ +70
5	Voltage	+3.3 v ± 5 %
6	Symmetry	40% to 60%
		CMOS (15 pF)
7	Pullability	NA
	Note:	

外形寸法 Dimensions

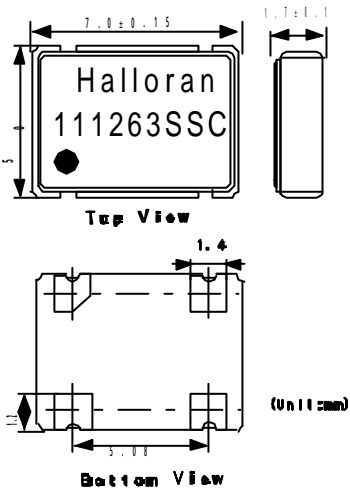

接続端子
Pin Connections

	\overline{INH}
	GND (V_{SS})
	OUTPUT
	+3.3 v (V_{DD})